








GROUP NO.	PART NO.	PERFORMANCE LEVEL		WEIGHT		MAXIMUM OVERALL DIMENSIONS						Core Value	WARRANTY FREE MONTHS	FOOTNOTES
		CCA	10 HR CAPACITY	(lb.)	(kg.)	LENGTH		WIDTH		HEIGHT				
						in	mm	in	mm	in	mm			
<b>12 VOLT — AGM — AUTHENTIC ETX POWER SPORTS</b>														
	ETX9	120	8	7.5	3.4	5-7/8	150	3-7/16	88	4-3/16	106	0.2	12	38,39,M
	ETX12	180	10	10	4.5	5-7/8	150	3-7/16	88	5-1/8	130	0.2	12	38,39,M
	ETX14	220	12	11.5	5.2	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	38,39,42,75,M
	ETX14L	220	12	11.5	5.2	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	38,39,M
	ETX15	220	13	11.5	5.2	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	38,39,42,76,M
	ETX15L	220	13	11.5	5.2	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	38,39,M
	ETX16	325	19	17	7.7	6-7/8	175	4	100	6-1/8	155	0.2	12	38,39,42,74,M
	ETX16L	325	19	17	7.7	6-7/8	175	4	100	6-1/8	155	0.2	12	38,39,42,74,M
	ETX18L	340	20	18	8.2	8-1/8	206	3-9/16	91	6-3/8	163	0.2	12	38,39,M
	ETX20L	310	17.5	15	6.8	7	178	3-1/2	90	6-1/8	155	0.2	12	38,39,M
	ETX30LA	400	26	21.5	9.8	6-5/8	168	5-3/16	131	7-3/4	197	0.2	12	38,39,78,M

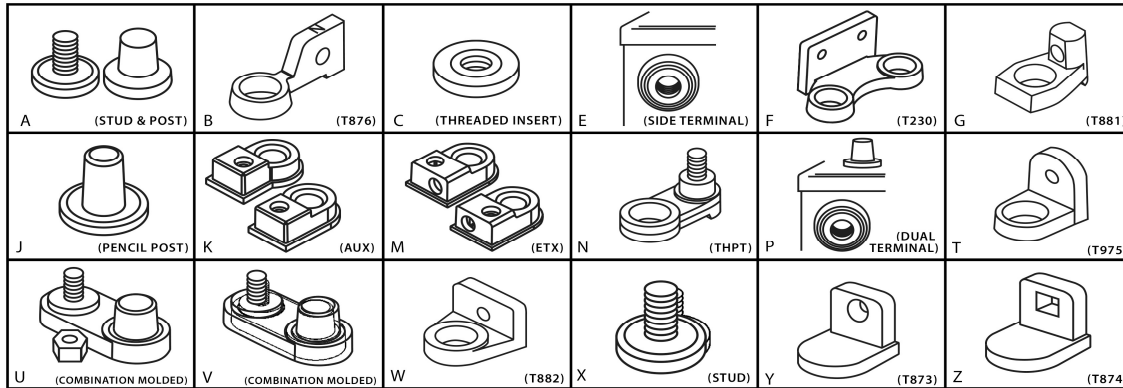

- A. Flush combination terminal w/ 5/16" stud and SAE post, hex nuts included
- B. Flag terminal w/ 3/8" diameter hole (T876)
- C. 1/4" - 20 copper Insert Terminal
- E. Side terminal automotive
- F. Double wide L terminal w/ two 3/8" holes (T230)
- G. Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut (T881)
- J. JIS terminal "pencil post"
- K. Molded-in top connection terminal (AUX)
- M. Molded-in top and side connection terminal (ETX)
- N. Vertical stainless steel 5/16" - 18 stud (THPT)
- P. Dual terminal, automotive top and side.
- T. Heavy duty L terminal w/ 3/8" diameter hole (T975)
- U. Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs & hex nuts
- V. Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs
- W. "L" type terminal w/ 5/16" diameter hole (T882)
- X. 3/8" - 16 stainless steel stud posts
- Y. Small L terminal with round hole
- Z. Small L terminal with square hole

- Batteries are maintenance-free calcium grids, except where noted
- Batteries manufactured in polypropylene cases & covers, except where noted
- Batteries manufactured in black cases & covers, except where noted
- SAE & DIN automotive posts used, unless noted
- Warranty is suggested months
- Weights are approximates
- CA and MCA ratings @ 32°F are approximations for comparison only
- Ratings except CCA and RC, are "nominal"
- CCA and RC ratings conform to B.C.I. specifications
- CCA on 8 Volt Marine & Industrial types is for reference only

**FOOTNOTES**

- 2. Black cover / Gray case
- 4. Gray cover / Gray case
- 6. Black cover / Brown case
- 8. Black cover / White case
- 11. Low maintenance-low antimony grids
- 12. Hybrid construction
- 13. Absorbed Glass Mat technology (AGM)
- 14. Centerline terminal posts
- 15. Hard rubber, one-piece cover construction
- 16. Dual terminal, universal design
- 17. Includes handle
- 18. Includes top adaptor
- 19. Includes lifting ledges
- 20. Hard rubber, multi-cell cover construction
- 21. Anchor locked elements
- 22. Flush manifold vented cover
- 24. CCA is an EN rating
- 25. With individual vent caps
- 28. For height with adaptor add 5/8" (16mm)
- 33. Fahrenheit Thermal Shielding Technology
- 34. Ratings after 15 cycles
- 35. Deduct 15% from CCA and CA to allow for double insulation (glass mat)
- 36. Peak performance capacity
- 37. For height with adapter add 7/8" (22mm)
- 38. "Non-spillable" as defined by DOT (Department of Transportation) definitions
- 39. "Non-spillable" as defined by ICAO (International Civil Aviation Organization) and IATA (International Air Transport Association) definitions
- 42. Height without adapter
- 43. Free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use
- 44. Free replacement warranty is 3 months in full electric vehicle use
- 45. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 6 months and 3 months in full electric vehicle use
- 46. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 18 months, free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use
- 74. Shipped with 20mm height adaptor
- 75. Shipped with two 17mm height adaptors
- 76. Shipped with 10mm height adaptor
- 78. Shipped with 22mm height adaptor

**PROPOSITION 65 WARNING:** Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Batteries also contain other chemicals known to the State of California to cause cancer.  
**WASH HANDS AFTER HANDLING.**